

SPECIFICATION
IL-TG-CW-2538-240
 THINGLOW SERIES

PROJECT	DATE
TYPE	QTY



FLEXIBLE LED STRIPS FOR COVE AND STEP LIGHTING

INDOOR CW

IL-TG-CW-2538-240-IP20

- IP20 (Non-Waterproof) SMD 5050 Flexible LED Strip
- LED Qty: 240LED s/m
- Dimensions: 500mm x 6mm x 0.22mm
- Voltage: DC 12/24V
- Power Consumption: (12V/24) 19.2 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller


OUTDOOR CW

IL-TG-CW-2538-240-IP68

- IP68 (Waterproof) SMD 5050 Flexible LED Strips, Silicone Tube + Silicone Glue
- LED Qty: 240LED s/m
- PCB Dimension: 500mm x 6mm x 0.22mm
- Voltage: DC 12/24V
- Power Consumption: (12V/24) 19.2 W/m
- 3/6 LED cuttable
- Dimmable with suitable driver or controller




CW-2538 12V - 240 LED/m - 19.2W/m

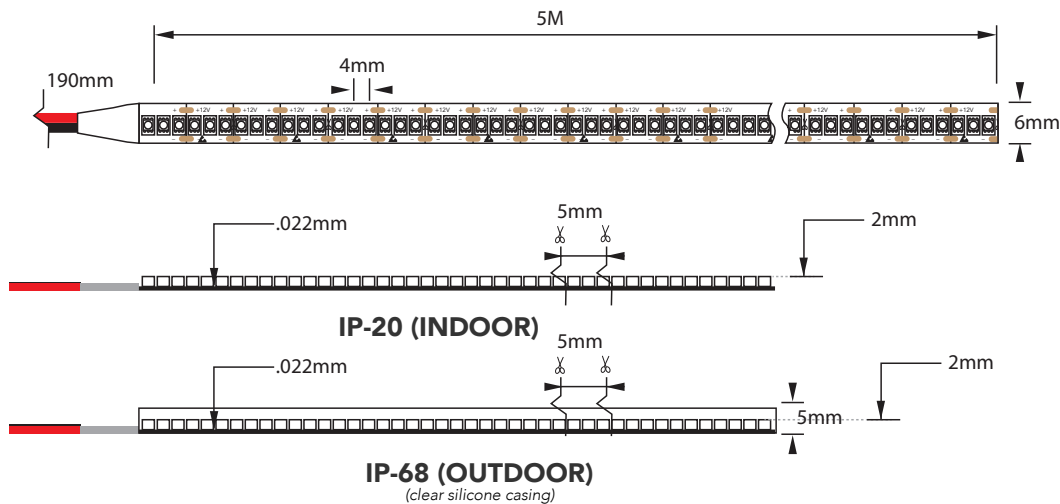

V. 320 | Copyright © 2020, Impact Lighting Inc. All Rights Reserved

CW-2538 24V - 240LED/m - 19.2W/m

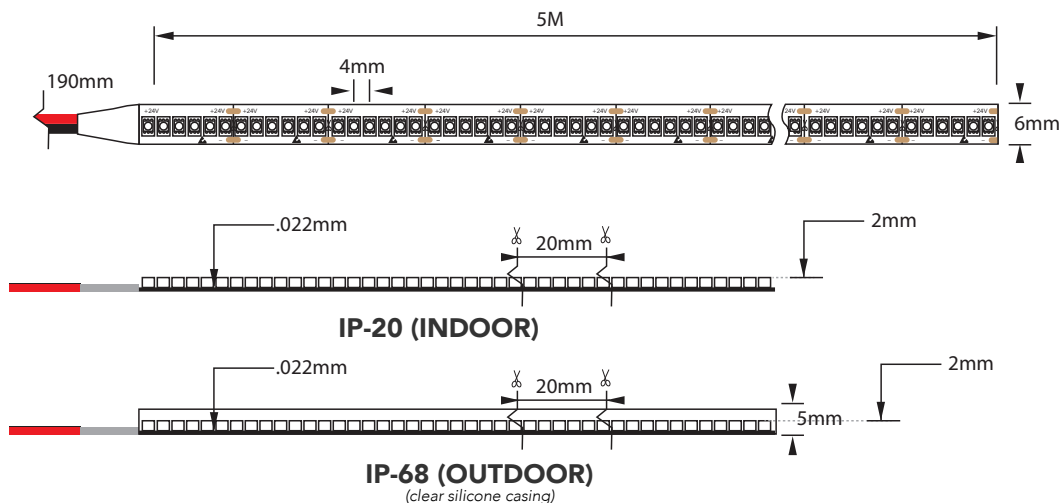

ORDERING

MODEL	IP Rating	Voltage	No. Reels
IL-TG-CW-2538-240			
ThinGlow™ Warm White 240 LED/m Flexible LED Strip	20 - IP20 68 - IP68	12 - 12V 24 - 24V	Write number of reels needed above